

Mini Dome Camera Series



MODEL	MDS 101A	MDS 247	MDS 200A	MDS 200HA
Pick up Element	1/3" B/W CCD Image Sensor	1/4" Color CCD Image Sensor	1/3" Color CCD Image Sensor	
Resolution	400 TV Lines	420 TV Lines	420 TV Lines	480 TV Lines (High Resolution)
Min. Illumination	0.1 Lux/F2.0	0.5 Lux/F2.0	0.3 Lux/F2.0	0.5 Lux/F2.0
Standard Board Lens	f 3.6mm /F2.0			
Audio	Yes	No	Yes	

MDS101A, MDS 246, MDS 247, MDS 200A, MDS200HA



MODEL	MDS 101SM	MDS 205SM
Pick up Element	1/3" B/W CCD Image Sensor	1/3" Color CCD Image Sensor
Resolution	400 TV Lines	420 TV Lines
Min. Illumination	0.1 Lux/F2.0	0.3 Lux/F2.0
Standard Board Lens	f 3.6mm	

MDS101SM, MDS 205SM



MODEL	MDS 202A	MDS 202 HA
Pick up Element	1/3" Color CCD Image Sensor	
Resolution	420 TV Lines	480 TV Lines (High Resolution)
Min. Illumination	0.5 Lux/F1.6~2.4	
Vari Focal Lens	4 ~ 9 mm	
Audio	Yes	

MDS202A, MDS 202 HA



MODEL	MDS 238	MDS 238 DN
Pick up Element	1/3" Color CCD	1/3" Color Day / Night Dome Camera
Resolution	420 TV Lines	420 TV Lines
Min. Illumination	0.3 Lux/F2.0	
Standard Board Lens	f 3.6mm	

MDS238, MDS238 DN



MODEL	MDS 238 H	MDS 238 HDN
Pick up Element	1/3" Color Dome Camera	1/3" Color Day/Night Dome Camera
Resolution	480 TV Lines (High Resolution)	
Min. Illumination	0.4 Lux/F2.0	
Standard Board Lens	f 3.6mm	
Flickerless	Yes	

MDS238H, MDS238HDN



MDS204VP
VANDAL PROOF MINI DOME CAMERA
1/3" Color Vandal Proof Dome Camera,
420 TVL, 0.5 lux/F2.0

MINI DOME PAN CAMERA (DOME WITH BUILT IN SCANNER)



DPC 237 **DPC 101**

MINI DOME CAMERA WITH BUILT IN 180 SCANNER	
1/3" Color CCD image sensor	1/3" B/W CCD image sensor
420 TV Lines	400 TV Lines
0.3 Lux/F2.0	0.1 Lux/F2.0



DPC1801-C / DPC1804-C

Model No	DPC1801-C	DPC1804-C
Channel	1 Channel	4 Channels
Operating Voltage	DC 24 V	
Operating Current	400mA	800mA
Controlled Pan Speed	5" / sec (in auto mode)	
Pan rotation angle	0° ~180° (angle of view)	
Control distance	Approx. 300 meter (Max)	
Dimension	23.5 X 17.7 X 5.0 cm	
Net Weight	430 g	520g




ALL SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTIFICATION

HYBRID DIGITAL SURVEILLANCE SYSTEM (HYBRID DSS)

IP CAMERA + CCTV CAMERA IN ONE SYSTEM



Main Remote Console CNM 7000

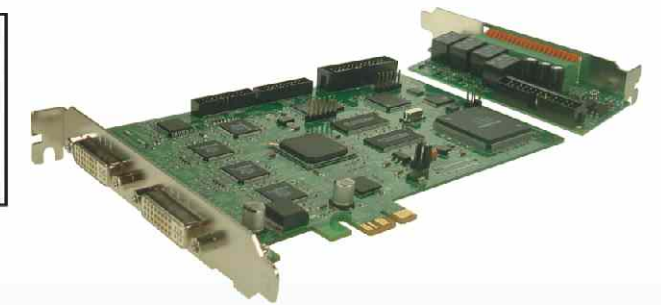


KEY FEATURES:

- DUAL CODEC, MPEG4 &** the latest technology H.264 compression
- HYBRID DSS**, support both IP and CCTV cameras
- DUAL MONITOR**, support dual monitor for independent for live display and playback or E-map
- VIDEO ENCRYPTION**: support video encryption for privacy and security
- VIDEO ENHANCER**: equipped with video enhancer software to adjust recorded video to the highest quality image
- VIDEO STABILIZER**: to fix and stabilize shaking image for better
- POS DATA OVERLAY**: data from POS can be inserted into recorded video
- TRUE D1 RESOLUTION**
- DIRECT BURN**: support direct writing file to CD-R/RW or DVR-R/RW drives

OUTSTANDING REMOTE ACCESS :

- Web viewer
- PDA viewer
- Smart phone viewer
- Handy viewer, support simple cell phone access for instant monitoring and notification
- CNM 7000 (CCTV network management system) for big system, can support up to 1024 DVR'S (optional)
- Advance remote console

APPLICATION DIAGRAM

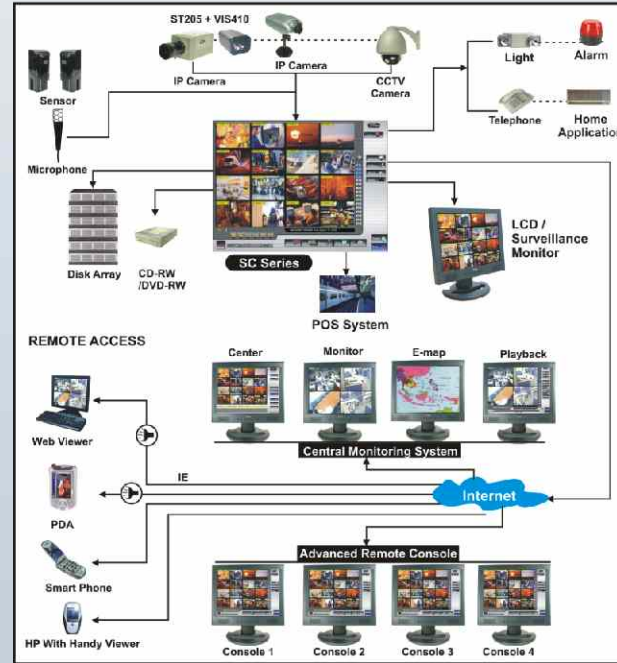

PRODUCT FEATURES

Category	Feature	Description
Video Source	Various Input	4~32 composite video inputs (BNC Connectors), support PTZ Cameras and IP Cameras
Display	Display Mode	Auto scan with full screen display under 1,4,8,9,13,16-camera display modes
Recording	Recording Mode	Continuous Recording/Smart Recording/ Motion Recording/Audio Recording/Alarm Recording/Manual Recording, All modes can be triggered by schedule
	De-interface Option	Optimize for dynamic or static camera scenes
	Motion Detection	Detecting any kind of movements within the camera focus
	Privacy Protection	Editable shield preventing private areas from monitoring and recording
Search & Playback	E-map Function	Show the positions of cameras, sensors, relays and triggered status
	Powerful search	By date, time, camera, area, event, vision, and log file
	Bookmark	Easily save links to particular locations of recorded data and play them directly from the saved links
Alarm Notification	Advanced Event Log Viewer	Details complete event logs according to your selection on event, operation, POS, system and network events
	Alarm Triggered Mode	Single event or multiple events as alarm trigger conditions/set keyword from POS / HDD error
Smart Alert Function	Smart Alert Function	Launch E-map/1-cam TV display/ warning sound/ Email/make a phone call/send files to FTP/ SMS and MMS/PTZ preset point tracking/ Alarm SOP wizard/start recording/ Enlarge camera view/send video to CMS

MODEL	Card		Video input	Display Speed (fps)		Record Speed (fps)		Audio input	TV Output	Sensor input / relay	IP Camera Access
	Main	Ext		NTSC	PAL	NTSC	PAL				
SCA 3004	1	0	4	30	25	30	25	1 (optional)	Yes	4/3	1
SCA 6008	2	0	8	60	50	60	50	1 (optional)	Yes	8/6	1
SCB120-04	1	0	4	120	100	120	100	4 (optional)	Yes	4/3	4
SCB120-08	1	1	8	120	100	120	100	4 (optional)	Yes	4/3	8
SCB120-12	1	2	12	120	100	120	100	4 (optional)	Yes	4/3	12
SCB120-16	1	3	16	120	100	120	100	4 (optional)	Yes	4/3	16
SCB240-08	2	0	8	240	200	240	200	4 (optional)	Yes	4/3	8
SCB240-16	2	2	16	240	200	240	200	4 (optional)	Yes	4/3	16
SCC240-16E	1	0	16	480	400	240	200	16	Yes	4/4	16
SCC480-32E	2	0	32	960	800	480	400	32	Yes	8/8	32
SCC480-16E	1	0	16	480	400	480	400	16	Yes	4/4	16
SCC960-32E	2	0	32	960	800	960	800	32	Yes	8/8	32

* SCC series have true PCI-E interface, 2 times faster data transfer speed than PCI interface

ALL SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTIFICATION